

LiNET Switch Data Sheet




LiNET Switch

Switch



The two LiNET inputs with Fall-Back functionality allow redundant audio connection to the LiNET Master.

All 4 LiNET outputs (4x 8 channels) are refreshed with no latency so that multiple units can be operated time aligned to a distance of 300 m or more.

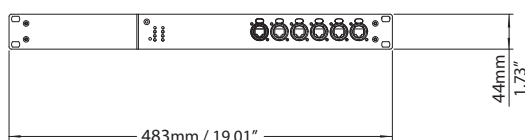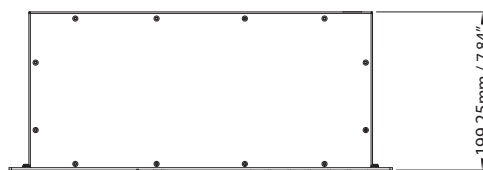

LiNET Switch Features

- ⊕ 19" / 1 U
- ⊕ 2x LiNET Inputs
- ⊕ with Fall-Back function
- ⊕ 4x LiNET Outputs
- ⊕ Zero latency

Other DATAD (Digital Audio Transport and Distribution) Products



	LiNET Master	LiNET Switch	ATEC
Product type:	Redundant 19" AES To LiNET Converter	Switch	AES to Ethernet Converter
Inputs	4 x AES/EBU 1 x LiNET	2 x LiNET	2 x AES/EBU
Outputs	4 x LiNET	4 x LiNET	LiNET / Ethernet
Word Clock	Yes	N/A	Yes
Sample Rate	44.1 - 192kHz	N/A	44.1 - 192kHz
Power Supply	2 (Redundant)	1	1
CAT5 Connection to LINUS Amps	Yes	Yes	Yes
Redundant Connection to LiNET Switch	Yes	Yes	N/A
Dimensions (WxHxD):	483 x 44 x 345 mm / 19" x 1.73" x 13.58" (1U)	483 x 44 x 345 mm / 19" x 1.73" x 13.58" (1U)	9.5"
Net weight:	3 kg / 6.61 lbs.	2.5 kg / 5.51 lbs.	1 kg / 2.20 lbs.

